

**STI-Taps**
**Machos STI**

	M MF	BSW BSF	UNC UNF UNX8	G BSP
Second Lead (Form D) Intermedio	40	44	42	46
Sets of 2 pcs. Juegos de 2 piezas	41		43	45
Spiral Point Punta en espiral	48			
Spiral Flute Helicoidal 35°	49			
Spark Plug Taps Machos "Spark Plug"	47			
Fluteless Taps Machos por Laminación	50			
STI-Drills Brocas STI	53			

**V-COIL rapid + Automotive**

STI-Taps Machos STI	51			
STI-Drills Brocas STI	51			
HexTap OS	52			
HexTap SP	52			
HexTap LS	52			
Oil Drain Screws Tornillos de purga aceite	54			
Retainer Ring OS Anillo de Junta OS	54			

**STI-Taps (Second Lead)**  
for Wire-Thread-Inserts ISO 2 (6H)


**Macho STI (Intermedio)**  
para Insertos roscados ISO 2 (6H)



**Form D HSS-G Tolerance ISO1 (4H)**

**M**

Nominal Diameter D	P	B	L 1	L 2	D 2	∅	Art.-No.	Price €
M 2	x 0.40	2.5	44.5	9.5	2.8	2.24	03001	6,60
M 2.5	x 0.45	3.1	48.0	11.0	3.15	2.50	03003	6,60
M 3	x 0.5	3.6	53.0	13.0	4.0	3.15	03005	5,80
M 3.5	x 0.6	4.3	53.0	13.0	4.5	3.55	03006	5,80
M 4	x 0.7	4.9	58.0	16.0	5.0	4.00	03007	5,80
M 5	x 0.8	6.0	66.0	19.0	6.3	5.00	03008	5,80
M 6	x 1.0	7.3	72.0	22.0	8.0	6.30	03009	5,80
M 7	x 1.0	8.3	72.0	22.0	9.0	7.10	03010	7,20
M 8	x 1.25	9.6	80.0	24.0	10.0	8.00	03011	7,20
M 8	x 1.0	9.3	80.0	24.0	10.0	8.00	03012	7,20
M 9	x 1.25	10.6	85.0	25.0	8.0	6.30	03013	8,80
M 10	x 1.5	11.9	89.0	29.0	9.0	7.10	03015	8,80
M 10	x 1.25	11.6	85.0	25.0	8.0	6.30	03016	8,80
M 10	x 1.0	11.3	85.0	25.0	8.0	6.30	03017	8,80
M 11	x 1.5	12.9	89.0	29.0	9.0	7.10	03018	10,00
M 12	x 1.75	14.3	95.0	30.0	11.2	9.00	03020	10,00
M 12	x 1.5	14.0	95.0	30.0	11.2	9.00	03021	12,20
M 12	x 1.25	13.6	95.0	30.0	11.2	9.00	03022	12,20
M 12	x 1.0	13.3	95.0	30.0	11.2	9.00	03023	12,20
M 14	x 2.0	16.6	102.0	32.0	12.5	10.00	03027	13,90
M 14	x 1.5	16.0	102.0	32.0	12.5	10.00	03028	13,90
M 14	x 1.25	15.6	102.0	32.0	12.5	10.00	03029	13,90
M 14	x 1.0	15.3	102.0	32.0	12.5	10.00	03030	13,90
M 16	x 2.0	18.6	112.0	37.0	14.0	11.20	03033	17,50
M 16	x 1.5	18.0	104.0	29.0	14.0	11.20	03034	17,50
M 18	x 2.5	21.3	118.0	38.0	16.0	12.50	03035	22,00
M 18	x 2.0	20.6	104.0	29.0	14.0	11.20	03036	22,00
M 18	x 1.5	20.0	104.0	29.0	14.0	11.20	03037	22,00
M 20	x 2.5	23.3	118.0	38.0	16.0	12.50	03038	24,30
M 20	x 2.0	22.6	113.0	33.0	16.0	12.50	03039	24,30
M 20	x 1.5	22.0	113.0	33.0	16.0	12.50	03040	24,30
M 22	x 2.5	25.3	130.0	45.0	18.0	14.00	03041	28,00
M 22	x 2.0	24.6	120.0	35.0	18.0	14.00	03042	28,00
M 22	x 1.5	24.0	120.0	35.0	18.0	14.00	03043	28,00
M 24	x 3.0	27.9	138.0	48.0	20.0	16.00	03044	35,30
M 24	x 2.0	26.6	127.0	37.0	20.0	16.00	03045	35,30
M 24	x 1.5	26.0	120.0	35.0	18.0	14.00	03046	35,30

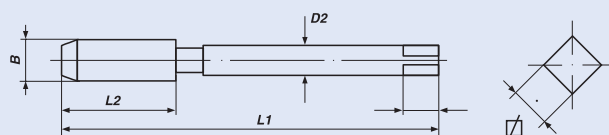

**STI-Taps, set of 2 pcs.**

for Wire-Thread-Inserts ISO 2 (6H)

**Machos Mano STI, en juegos de 2 piezas**


para Insertos roscados ISO 2 (6H)



**HSS-G Tolerance ISO1 (4H)**

**M**

Nominal Diameter D	P	B	L 1	L 2	D 2	∅	Art.-No.	Price €
M 26	x 1.5	28.0	127	37	20.0	16.0	03049	115,00
M 27	x 3.0	30.9	151	51	22.4	18.0	03050	115,00
M 27	x 2.0	29.6	127	37	20.0	16.0	03051	115,00
M 27	x 1.5	29.0	127	37	20.0	16.0	03052	115,00
M 28	x 1.5	30.0	127	37	20.0	16.0	03053	115,00
M 30	x 3.5	34.6	162	57	25.0	20.0	03054	151,00
M 30	x 2.0	32.6	137	37	22.4	18.0	03055	151,00
M 30	x 1.5	32.0	137	37	22.4	18.0	03056	151,00
M 33	x 3.5	37.6	162	57	25.0	20.0	03057	158,00
M 33	x 2.0	35.6	144	37	25.0	20.0	03058	158,00
M 36	x 4.0	41.2	170	60	28.0	22.4	03060	175,00
M 36	x 3.0	39.9	170	60	28.0	22.4	03061	175,00
M 36	x 2.0	38.6	150	39	28.0	22.4	03062	175,00
M 36	x 1.5	38.0	150	39	28.0	22.4	03063	175,00



## STI-Taps (Second Lead)

for Wire-Thread-Inserts Tolerance 2B

## Machos STI (Intermedio)

para Insertos roscados Tolerancia 2B




### Form D

### HSS-G

### Tolerance 3B

## UNC/UNF

Nominal Diameter D	B	L 1	L 2	D 2	∅	Art.-No.	Price €
<b>UNC/NC</b>							
No. 2 x 56	2.8	48.0	10.0	3.15	2.5	03100	8,80
No. 4 x 40	3.7	53.0	13.0	4.0	3.15	03101	8,80
No. 5 x 40	4.0	53.0	13.0	4.0	3.15	03102	8,80
No. 6 x 32	4.5	58.0	16.0	5.0	4.00	03103	8,80
No. 8 x 32	5.2	62.0	17.0	5.6	4.50	03104	8,80
No. 10 x 24	6.2	66.0	19.0	6.3	5.00	03105	8,80
No. 12 x 24	6.9	66.0	19.0	7.1	5.60	03106	8,80
1/4 x 20	8.0	72.0	22.0	8.0	6.30	03107	5,80
5/16 x 18	9.8	80.0	24.0	10.0	8.00	03108	6,30
3/8 x 16	11.6	85.0	25.0	8.0	6.30	03109	6,60
7/16 x 14	13.5	95.0	30.0	11.2	9.00	03110	8,80
1/2 x 13	15.2	102.0	32.0	12.5	10.00	03111	10,00
9/16 x 12	17.0	112.0	37.0	14.0	11.20	03112	16,60
5/8 x 11	18.9	112.0	37.0	14.0	11.20	03113	20,50
3/4 x 10	22.4	118.0	38.0	16.0	12.50	03114	24,90
7/8 x 9	25.9	130.0	45.0	18.0	14.00	03115	36,00
1" x 8	29.5	138.0	48.0	20.0	16.00	03116	36,00
<b>UNF/NF</b>							
No. 4 x 48	3.5	53.0	13.0	4.0	3.15	03151	8,80
No. 6 x 40	4.3	53.0	13.0	4.5	3.55	03152	8,80
No. 8 x 36	5.1	62.0	17.0	5.6	4.50	03153	8,80
No. 10 x 32	5.9	66.0	19.0	6.3	5.00	03154	8,80
1/4 x 28	7.5	69.0	19.0	8.0	6.30	03155	5,80
5/16 x 24	9.3	76.0	20.0	10.0	8.00	03156	6,30
3/8 x 24	10.9	82.0	22.0	8.0	6.30	03157	6,60
7/16 x 20	12.8	84.0	24.0	9.0	7.10	03158	8,80
1/2 x 20	14.4	90.0	25.0	11.2	9.00	03159	10,00
9/16 x 18	16.1	104.0	29.0	12.5	10.00	03160	16,60
5/8 x 18	17.7	104.0	29.0	14.0	11.20	03161	20,50
3/4 x 16	21.1	104.0	29.0	14.0	11.20	03162	24,90
7/8 x 14	24.6	120.0	35.0	18.0	14.00	03163	36,00
1" x 12	28.2	127.0	37.0	20.0	16.00	03164	36,00
1" x 14	27.8	127.0	37.0	20.0	16.00	03165	36,00



**STI-Taps, sets of 2 pcs.**  
for Wire-Thread-Inserts Tolerance 2B


**Machos Mano STI, en juegos de 2 piezas**  
para Insertos roscados Tolerancia 2B



**HSS-G Tolerance 3B**

**UNC/UNF**

Nominal Diameter D	B	L 1	L 2	D 2	∅	Art.-No.	Price €
<b>UNC/NC</b>							
1.1/8 x 7	33.3	151	51	22.4	18.0	03117	107,00
1.1/4 x 7	36.5	162	57	25.0	20.0	03118	130,00
1.3/8 x 6	40.4	170	60	28.0	22.4	03119	157,00
1.1/2 x 6	43.6	187	67	31.5	25.0	03120	210,00
<b>UNF/NF</b>							
1.1/8 x 12	31.3	137	37	22.4	18.0	03166	107,00
1.1/4 x 12	34.5	144	39	25.0	20.0	03167	130,00
1.3/8 x 12	37.7	150	39	28.0	22.4	03168	157,00
1.1/2 x 12	40.9	150	39	28.0	22.4	03169	210,00
<b>UNx8</b>							
1.1/8 x 8	1.1/4	151	51	22.4	18.0	03191	107,00
1.1/4 x 8	1.3/8	162	57	25.0	20.0	03192	130,00
1.3/8 x 8	1.1/2	170	60	28.0	22.4	03193	157,00
1.1/2 x 8	1.5/8	170	60	28.0	22.4	03194	210,00
1.5/8 x 8	1.3/4	187	67	31.5	25.0	03195	220,00
1.3/4 x 8	1.7/8	187	67	31.5	25.0	03196	320,00
1.7/8 x 8	2"	200	70	35.5	28.0	03197	320,00
2" x 8	2.1/8	200	70	35.5	28.0	03198	635,00



## STI-Taps (Second Lead)

for Wire-Thread-Inserts

## Machos STI (Intermedio)

para Insertos roscados




**Form D**

**HSS-G**

**BSW/BSF**

Nominal Diameter D	B	L 1	L 2	D 2	∅	Art.-No.	Price €
<b>BSW</b>							
1/8 x 40	3.9	53.0	13.0	4.0	3.15	03201	5,80
3/16 x 24	6.0	56.0	19.0	6.3	5.00	03202	5,80
1/4 x 20	7.8	72.0	22.0	8.0	6.30	03203	5,80
5/16 x 18	9.6	80.0	24.0	10.0	8.00	03204	6,30
3/8 x 16	11.4	85.0	25.0	8.0	6.30	03205	6,60
7/16 x 14	13.2	95.0	30.0	11.2	9.00	03206	8,80
1/2 x 12	15.2	102.0	32.0	12.5	10.00	03207	10,00
9/16 x 12	16.8	102.0	32.0	12.5	10.00	03208	16,60
5/8 x 11	18.6	112.0	37.0	14.0	11.20	03209	20,50
11/16 x 11	20.2	112.0	37.0	14.0	11.20	03210	24,90
3/4 x 10	22.0	118.0	38.0	16.0	12.50	03211	24,90
7/8 x 9	25.5	130.0	45.0	18.0	14.00	03212	36,00
1" x 8	29.1	138.0	48.0	20.0	16.00	03213	36,00
<b>BSF</b>							
3/16 x 32	5.7	66.0	19.0	6.3	5.00	03251	5,80
1/4 x 26	7.5	72.0	22.0	8.0	6.30	03253	5,80
5/16 x 22	9.3	80.0	24.0	10.0	8.00	03255	6,30
3/8 x 20	11.0	85.0	25.0	8.0	6.30	03256	6,60
7/16 x 18	12.8	89.0	29.0	9.0	7.10	03257	8,80
1/2 x 16	14.6	95.0	30.0	11.2	9.00	03258	10,00
9/16 x 16	16.2	102.0	32.0	12.5	10.00	03259	16,60
5/8 x 14	18.0	112.0	37.0	14.0	11.20	03260	20,50
11/16 x 14	19.6	112.0	37.0	14.0	11.20	03261	24,90
3/4 x 12	21.5	118.0	38.0	16.0	12.50	03262	24,90
7/8 x 11	24.9	130.0	45.0	18.0	14.00	03264	36,00
1" x 10	28.4	138.0	48.0	20.0	16.00	03265	36,00



**STI-Taps, sets of 2 pcs.**

for Wire-Thread-Inserts

**Machos Mano STI, en juego de 2 piezas**


para Insertos roscados



**HSS-G**

**G (BSP)**

Nominal Diameter D	B	L 1	L 2	D 2	∅	Art.-No.	Price €
<b>G (BSP)</b>							
1/8 x 28	10.8	59	15	8.0	6.3	03311	16,50
1/4 x 19	14.7	67	19	11.2	9.0	03312	21,00
3/8 x 19	18.3	75	21	14.0	11.2	03313	27,30
1/2 x 14	23.1	87	26	16.0	12.5	03314	44,50
5/8 x 14	25.1	91	26	18.0	14.0	03315	65,20
3/4 x 14	28.6	96	28	20.0	16.0	03316	65,20
7/8 x 14	32.4	102	29	22.4	18.0	03318	104,00
1" x 11	36.0	109	33	25.0	20.0	03317	104,00



## STI-Taps (Second Lead)

for Wire-Thread-Inserts

## Machos STI (Intermedio)


para Insertos roscados



### Form D

### HSS-G

Nominal Diameter D	B	L 1	L 2	D 2	∅	Art.-No.	Price €
<b>G (BSP)</b>							
1/8 x 28	10.8	59.0	15.0	8.0	6.30	03301	8,30
1/4 x 19	14.7	67.0	19.0	11.2	9.00	03302	10,50
3/8 x 19	18.3	75.0	21.0	14.0	11.20	03303	13,60
1/2 x 14	23.1	87.0	26.0	16.0	12.50	03304	22,20
5/8 x 14	25.0	91.0	26.0	18.0	14.00	03305	32,60
3/4 x 14	28.6	96.0	28.0	20.0	16.00	03306	32,60
1" x 11	36.0	109.0	33.0	25.0	20.00	03307	52,00
<b>BA</b>							
BA 0	7.1	66.0	19.0	7.1	5.60	03321	5,80
BA 2	5.6	66.0	19.0	6.3	5.00	03323	5,80
BA 4	4.4	53.0	13.0	4.5	3.55	03325	5,80
BA 6	3.4	50.0	13.0	3.55	2.80	03327	5,80
<b>BS. Brass</b>							
1/4 x 26	7.5	69.0	19.0	8.0	6.30	03341	7,50
5/16 x 26	9.1	76.0	20.0	10.0	8.00	03342	8,30
3/8 x 26	10.7	82.0	22.0	8.0	6.30	03343	8,80
7/16 x 26	12.3	84.0	24.0	9.0	7.10	03344	11,20
1/2 x 26	13.9	90.0	25.0	11.2	9.00	03345	16,50





## STI-Spark Plug Taps with Pilot Nose

for Wire-Thread-Inserts ISO 2 (6H)

## Machos Combinados STI

para Insertos roscados ISO 2 (6H)




**HSS-G**

**Tolerance ISO 1 (4H)**

**M**

Nennmaß D	P	B1	B2	L 3	L 2	L 1	D 2	∅	Art.-No.	Price €
M 6	x 1.0	7.3	6	7	28	70	8	6.3	03630	11,00
M 8	x 1.25	9.6	8	9	32	75	8	6.3	03631	12,00
M 10	x 1.5	11.9	10	9	37	80	9	7.1	03632	15,40
M 10	x 1.25	11.6	10	8	30	74	8	6.3	03637	15,40
M 10	x 1.0	11.3	10	8	30	74	8	6.3	03633	15,40
M 12	x 1.25	13.6	12	9	32	75	9	7.1	03634	20,00
M 14	x 1.25	15.6	14	10	45	90	12	9.2	03635	23,20
M 18	x 1.5	20.0	18	10	47	116	16	12.5	03636	33,20

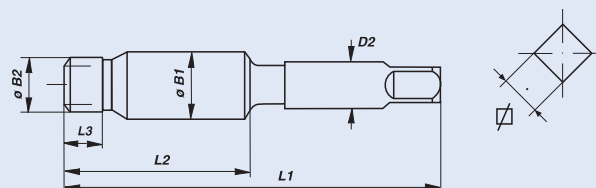

**STI-Machine Taps (Spiral Point)**

for Wire-Thread-Inserts ISO 2 (6H)

**Machos Máquina STI (Pasante)**

para Insertos roscados ISO 2 (6H)




**Form B**

**HSS-E**

**Tolerance ISO 1 (4H)**

**M**

Nominal Diameter D	P	B	L 1	L 2	D 2	∅	Art.-No.	Price €
M 3	x 0.5	3.6	53.0	13.0	4.0	3.15	03505	6,60
M 3.5	x 0.6	4.3	53.0	13.0	4.5	3.55	03506	6,60
M 4	x 0.7	4.9	58.0	16.0	5.0	4.00	03507	6,60
M 5	x 0.8	6.0	66.0	19.0	6.3	5.00	03508	7,50
M 6	x 1.0	7.3	72.0	22.0	8.0	6.40	03509	7,80
M 7	x 1.0	8.3	72.0	22.0	9.0	7.10	03510	9,50
M 8	x 1.25	9.6	80.0	24.0	10.0	8.00	03511	9,50
M 8	x 1.0	9.3	80.0	24.0	10.0	8.00	03512	9,50
M 10	x 1.5	11.9	89.0	29.0	9.0	7.10	03515	12,00
M 10	x 1.0	11.3	85.0	25.0	8.0	6.30	03517	12,00
M 12	x 1.75	14.3	95.0	30.0	11.2	9.00	03520	18,00
M 12	x 1.5	14.0	95.0	30.0	11.2	9.00	03521	18,30
M 12	x 1.25	13.6	95.0	30.0	11.2	9.00	03522	18,30
M 14	x 2.0	16.6	102.0	32.0	12.5	10.00	03527	21,50
M 14	x 1.5	16.0	102.0	32.0	12.5	10.00	03528	21,50
M 14	x 1.25	15.6	102.0	32.0	12.5	10.00	03529	21,50
M 16	x 2.0	18.6	112.0	37.0	14.0	11.20	03533	22,50

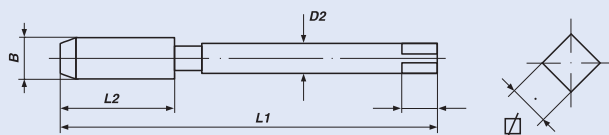

## STI-Machine Taps (Spiral Flute)

for Wire-Thread-Inserts ISO 2 (6H)

## Machos Máquina STI (Helicoidal)

para Insertos roscados ISO 2 (6H)




Form C/35°RSP

HSS-E

Tolerance ISO 1 (4H)

M

Nominal Diameter D	P	B	L 1	L 2	D 2	∅	Art.-No.	Price €
M 3	x 0.5	3.6	53.0	13.0	4.0	3.15	03705	6,60
M 3.5	x 0.6	4.3	53.0	13.0	4.5	3.55	03706	6,60
M 4	x 0.7	4.9	58.0	16.0	5.0	4.00	03707	6,60
M 5	x 0.8	6.0	66.0	19.0	6.3	5,00	03708	7,20
M 6	x 1.0	7.3	72.0	22.0	8.0	6.40	03709	7,50
M 7	x 1.0	8.3	72.0	22.0	9.0	7.10	03710	9,50
M 8	x 1.25	9.6	80.0	24.0	10.0	8.00	03711	9,50
M 8	x 1.0	9.3	80.0	24.0	10.0	8.00	03712	9,50
M 10	x 1.5	11.9	89.0	29.0	9.0	7.10	03715	11,40
M 10	x 1.0	11.3	85.0	25.0	8.0	6.30	03717	11,40
M 12	x 1.75	14.3	95.0	30.0	11.2	9.00	03720	18,00
M 12	x 1.5	14.0	95.0	30.0	11.2	9.00	03721	18,30
M 12	x 1.25	13.6	95.0	30.0	11.2	9.00	03722	18,30
M 14	x 2.0	16.6	102.0	32.0	12.5	10.00	03727	21,30
M 14	x 1.5	16.0	102.0	32.0	12.5	10.00	03728	21,30
M 14	x 1.25	15.6	102.0	32.0	12.5	10.00	03729	21,30
M 16	x 2.0	18.6	112.0	37.0	14.0	11.20	03733	22,50

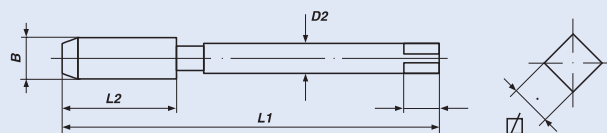

## STI-Fluteless Taps

for Wire-Thread-Inserts ISO 2 (6H)

## Machos STI por Laminación

para Insertos roscados ISO 2 (6H)



HSS-E

Tolerance ISO 1 (4H)


M

Nominal Diameter D	P	B	L 1	L 2	D 2	∅	Art.-No.	Price €
M 3	x 0.5	3.6	53.0	13.0	4.0	3.15	03605	10,00
M 4	x 0.7	4.9	58.0	16.0	5.0	4.00	03607	10,80
M 5	x 0.8	6.0	66.0	19.0	6.3	5,00	03608	10,80
M 6	x 1.0	7.3	72.0	22.0	8.0	6.40	03609	12,40
M 8	x 1.25	9.6	80.0	24.0	10.0	8.00	03611	14,90
M 10	x 1.5	11.9	89.0	29.0	9.0	7.10	03615	17,60
M 12	x 1.75	14.3	95.0	30.0	11.2	9.00	03620	24,90

**Recommended  
Core Hole Diameter**

**Diámetro de taladro para roscar  
recomendado**

D	M 3	M 4	M 5	M 6	M 8	M 10	M 12
∅	3,4	4,6	5,6	6,8	9,0	11,2	13,4

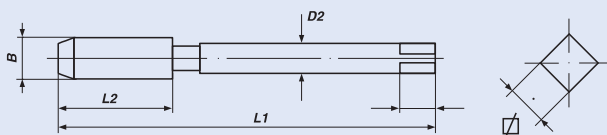

## STI-Gewindebohrer V-COIL rapid

für Gewindeeinsätze nach ISO 2 (6H)

### V-COIL rapid Taraud STI

pour filets rapportés selon ISO 2 (6H)



**Form D HSS-G Toleranz ISO 1 (4H)**

**M**

Nennmaß D	B	L 1	L 2	⊘	Art.-No.	Preis €
M 2.5 x 0.45	3.1	36.0	11.0	1/4"	03090	3,50
M 3 x 0.5	3.6	36.0	11.0	1/4"	03091	3,50
M 4 x 0.7	4.9	36.0	13.0	1/4"	03092	3,70
M 5 x 0.8	6.0	36.0	16.0	1/4"	03093	3,70
M 6 x 1.0	7.3	36.0	17.0	1/4"	03094	5,40
M 8 x 1.25	9.6	42.0	20.0	1/4"	03095	7,30
M 10 x 1.5	11.9	50.0	24.0	1/4"	03096	9,70
M 12 x 1.75	14.3	50.0	29.0	1/4"	03097	10,50

## STI-Spiralbohrer V-COIL rapid

### V-COIL rapid Foret STI



Nennmaß D	L 1	S 2	⊘	Art.-No.	Preis €
2.6 mm	36.0	16.0	1/4"	03080	3,60
3.2 mm	36.0	16.0	1/4"	03081	3,60
4.2 mm	36.0	16.0	1/4"	03082	3,60
5.2 mm	46.0	26.0	1/4"	03083	3,60
6.3 mm	46.0	26.0	1/4"	03084	3,60
8.3 mm	46.0	26.0	1/4"	03085	4,60
10.4 mm	50.0	33.5	1/4"	03086	6,00
12.4 mm	50.0	33.5	1/4"	03087	7,10

## HexTap OS

for oil drain screw threads

## HexTap OS

para roscas de tornillo de purga aceite



### Multi-Drive HSS-G Tolerance ISO2 (6H)

Nominal Diameter D	Type	L1	L2	SW1	SW2	Art.-No.	Price €
M 13 x 1.5	OS	50	21	16	4	19002	17,50
M 15 x 1.5	OS	50	21	16	4	19003	17,50
M 17 x 1.5	OS	50	21	16	5	19004	20,00
M 20 x 1.5	OS	50	21	16	6	19005	24,00
M 24 x 1.5	OS	50	21	16	8	19006	29,00

## HexTap SP

for spark plug thread M 14x1,25

## HexTap SP

para roscas de las bujías M 14x1,25



### Multi-Drive HSS-G Tolerance ISO2 (6H)

Nominal Diameter D	Type	L1	L2	SW1	SW2	Art.-No.	Price €
M 16 x 1.25	SP	70	41	16	4	19001	29,50

## HexTap LS

for oxygen sensor thread M 18x1,5

## HexTap LS

para roscas del sensor de oxígeno M 18x1,5



### Multi-Drive HSS-G Tolerance ISO2 (6H)

Nominal Diameter D	Type	L1	L2	SW1	Ø	Art.-No.	Price €
M 18 x 1,5	LSN	40	27	14	6,3	19008	18,00
M 20 x 1,5	LS	50	21	14	6,3	19007	25,00